



## CAR SECURITY

### SPECIFIC VEHICLE ALARM FITTING INSTRUCTIONS

REV. 00

www.cobra.it

MAKE	LANCIA	MOD.	Z	YEAR	02 →	PETROL <input checked="" type="checkbox"/>	DIESEL <input type="checkbox"/>
<b>ALARM/SIREN POSITION</b>	Position the compact alarms and the sirens on the right of the engine compartment. Modular systems and modules can be installed behind the central tunnel. Pass the cables through the original rubber sleeve used for the bonnet opening wire located under the driver's side windows-washer.						
<b>POWER SUPPLY</b>	+ <b>30</b> : connect to the big wire which supply the fuse box. - <b>31</b> : connect with a cable terminal to one of the ground terminals located on the left lateral bulkhead.						
<b>IGNITION WIRE</b>	+ <b>15/54</b> : connect to the GREEN wire marked A16A located in the connector marked 888B, under the driver's side dashboard.						
<b>DIRECTION INDICATORS</b>	Connect to the GREEN wires marked nr.233 and nr. 234 located in the wiring harness coming out of the lights switch connector.						
<b>ELECTRIC WINDOWS</b>	<b>Negative at rest</b> <b>Front window, driver's side:</b> cut the 2 mm <sup>2</sup> WHITE wire marked nr.6050 located in the wiring harness coming out of the window central placed directly inside the driver's side door. <b>Front window, passenger's side:</b> cut the 1,5 mm <sup>2</sup> WHITE wire located in the wiring harness coming out of the driver's side door. <b>Compasses rear window, driver's side:</b> cut the GREEN wire marked nr.6803. <b>Compasses rear window, passenger's side:</b> cut the GREEN wire marked nr.6813. The rear windows connection must be carried out behind the respective covering members.						
<b>CENTRAL DOORS LOCKING</b>	<b>Negative control signal</b> Cut the ORANGE wire. Refer to <b>diagram nr.136</b> for 7900 serie antithefts. For 3100 and 3900 series antithefts refer to the <b>diagram nr.136A</b> .						
<b>IMMOBILISATION POINT 1</b>	<b>Fuel pump</b> Cut the WHITE wire marked nr.121 located in the connector 888B placed under the driver's side dashboard.						
<b>IMMOBILISATION POINT 2</b>	<b>Inertial switch</b> Cut the GREY wire marked nr.1286 located under the oil bowl of the passenger's side servobrake.						
<b>STARTER</b>	+ <b>50</b> : Cut the WHITE wire marked nr.106 located in the wiring harness placed near the bonnet opening handle.						
<b>DOORS AND BOOT SWITCH</b>	Connect to the ORANGE wire marked nr. 4903 located in the wiring harness coming out of the connector marked 888B.						



CAR SECURITY


SPECIFIC VEHICLE ALARM FITTING INSTRUCTIONS

REV. 00

www.cobra.it

FITTING DIAGRAM N° 136

Diagram to make the central locking on  
**LANCIA Z** year 2002  
(for Bridge serie antithefts)

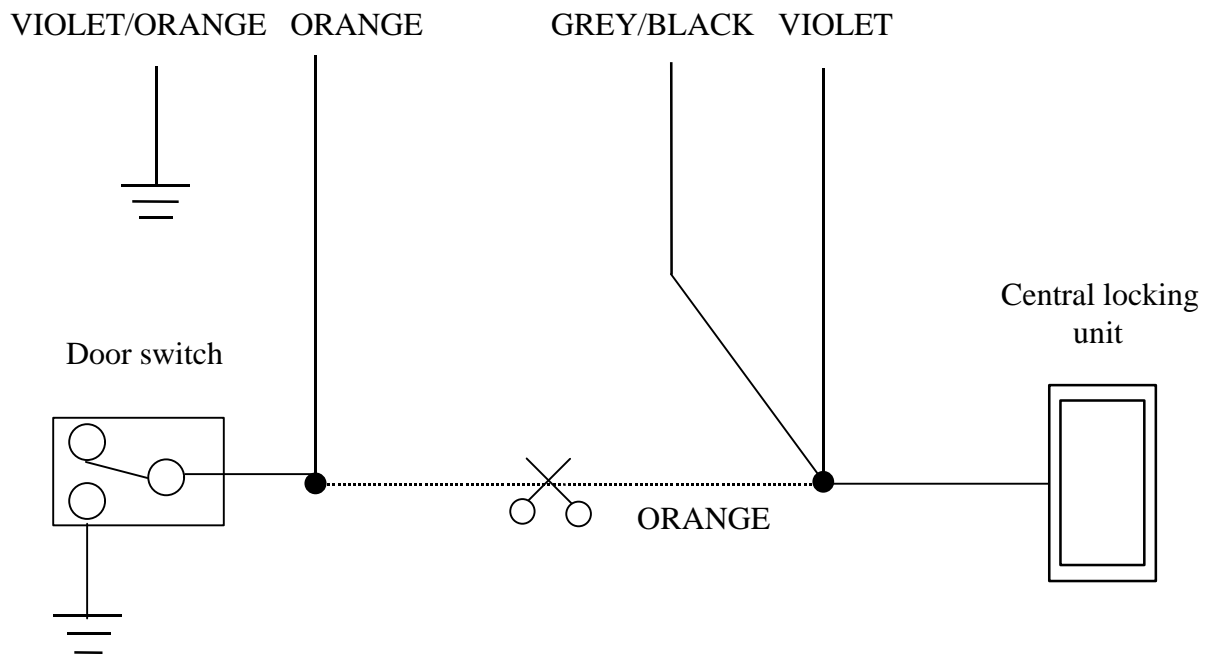



CAR SECURITY

SPECIFIC VEHICLE ALARM FITTING INSTRUCTIONS

REV. 00

www.cobra.it

FITTING DIAGRAM N° 136A

Diagram to make the central locking on  
**LANCIA Z** year 2002  
(for 3100 serie antithefts)

