



CAR SECURITY

SPECIFIC VEHICLE ALARM FITTING INSTRUCTIONS

REV. 00

www.cobra.it

MAKE **MERCEDES** MOD. **A 140*** YEAR **97** → PETROL DIESEL

* Models with original equipment keyless entry system.

| | |
|-------------------------------|--|
| ALARM/ SIREN POSITION | Position the compact alarms and the sirens in the engine compartment, on the support of the shock absorber, passenger's side. The modular system and the modules should be positioned under the passenger's footrest. Pass the cables through the original rubber plug located in the black box on the bulkhead, passenger's side. |
| POWER SUPPLY | + 30: Connect to the 3 mm ² RED wire in the wiring harness coming out of the 5 way black connector located in the connections under the dashboard on the passenger's side. - 31: Connect with a terminal to one of the original bolts in the connections under the dashboard on the passenger's side. |
| IGNITION WIRE | Connect to the 1,5 mm ² RED/GREEN wire located in the wiring harness coming out of the fuse nr.1 in the fuse box, under the mat, drivers's side. |
| DIRECTION INDICATORS | Connect to the 1 mm ² BLACK/WHITE and BLACK/YELLOW wires located in the bundle of cables that runs from the passenger's sill cover to the engine compartment, under the glove box, passenger's side. |
| ELECTRIC WINDOWS | Positive control signal Front window, driver's side: Cut the 1,5 mm ² GREEN wire. Front window, passenger's side: Cut the 1,5 mm ² GREEN/WHITE wire. |
| ALARM CONTROLS | Negative control signal If the vehicle has the serial radio control, it is suggested to install the alarm Art. 0144. To arm/disarm the system use the pulses supplied by the additional "vacuum actuator" . See diagram nr. 43. |
| IMMOBILISATION POINT 1 | Fuel pump Cut the 1,5 mm ² RED/BLUE wire in the wiring harness that comes out of the relay marked "K7", in the fuse holder box located in the battery compartment under the passenger's floor mat. |
| IMMOBILISATION POINT 2 | Additional immobilisation point Cut the RED/GREEN wire located in the wiring harness coming out of the relay marked "K7", in the fuse holder box, in the battery compartment under the passenger's floor mat. |
| STARTER | + 50: Cut the 1,5 mm ² PINK/RED wire located in the wiring harness that comes out of the relay marked "K8", in the fuse holder box, in the battery compartment under the passenger's floor mat. |
| BONNET SWITCH | Install an additional switch on the headlamp support plate, on the right or left of the engine compartment. |
| DOORS AND BOOT SWITCH | Connect to the 1 mm ² BROWN/RED wire located in the bundle of cables that runs from the dashboard on the passenger's side to the "A pillar". |




CAR SECURITY

SPECIFIC VEHICLE ALARM FITTING INSTRUCTIONS

REV. 00

www.cobra.it

FITTING DIAGRAM N° 43

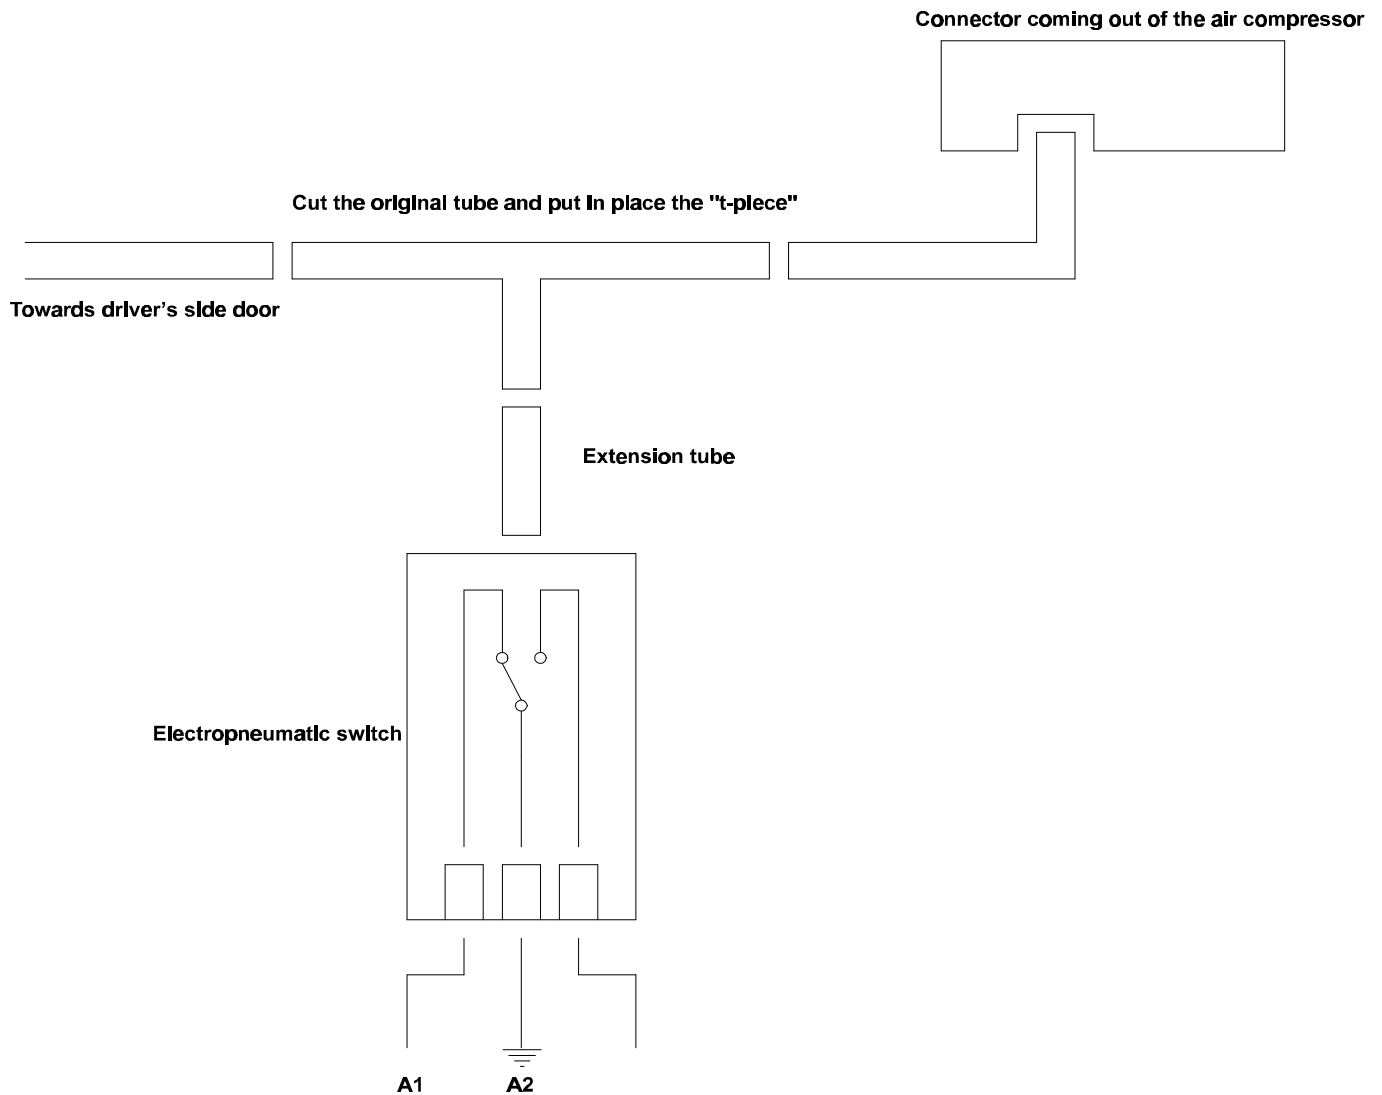

A1 alarm setting negative control signal

A2 alarm unsetting negative control signal

The components mentioned above can be requested directly to the Mercedes dealer referring to the mentioned codes.

A 202800322 "T" tube

A 2028050244 extension tube

A 1248001675 electropneumatic switch