



CAR SECURITY

SPECIFIC VEHICLE ALARM FITTING INSTRUCTIONS

REV. 00

www.cobra.it

MAKE **VOLKSWAGEN**

MOD.

LT 35

YEAR

01 →

PETROL
DIESEL

ALARM/SIREN POSITION	Position the compact alarms and the sirens on the support of the shock absorber, passenger's side.
CENTRAL UNIT POSITION	The modular systems and the modules should be positioned under the dashboard, passenger's side.
POWER SUPPLY	+ 30: connect to the general supply wiring of the fuse box. - 31: connect to one of the ground derivation located behind the left lateral bulkhead, driver's side.
IGNITION WIRE	+ 15/54: connect to the BLACK wire, at the position nr. 2 of the 18 way connector marked A125, located in the fuse box fixed to the steering column.
DIRECTION INDICATORS	Connect to the BLACK/GREEN wire, at the position nr.17 and to the BLACK/WHITE wire, at the position nr.15 of the 18 way connector, marked A125, located in the fuse box fixed to the steering column.
ELECTRIC WINDOWS	Controls with mixed polarity Front window, drivers side: cut the BLACK/WHITE wire (positive on closing) and BLUE/WHITE wire (negative on closing) located in the wiring harness coming out of the driver's side door. Front window, passengers side: cut the BLACK wire (positive on closing) and BLUE wire (negative on closing) located in the wiring harness coming out of the passenger's side door.
CENTRAL DOORS LOCKING	Door's original motor controls Cut the BLUE/RED wire, at the position nr.11 (lock) and BLACK/RED, at the position nr.10 (unlock), located in the wiring harness coming out of the connector of the central doors locking unit placed under the driver's side seat. Refer to diagram nr. 118 for antithefts of the Bridge serie. For antithefts of the 3100 serie refer to diagram nr. 118A .
IMMOBILISATION POINT	Gasoil pump Cut the BLACK wire, at the position nr.7, in the 12 way connector, located in the fuse box fixed to the steering column.
STARTER	+ 50: Cut the wire at the position "+50" directly in the wiring harness coming out of the connector of the ignition key.
BONNET SWITCH	Install an additional switch on the headlamp support plate, driver's side.
FRONT AND REAR DOORS SWITCH	Connect to the BROWN/WHITE wire located in the wiring harness coming out of the driver's side door and to the BROWN/WHITE wire located in the wiring harness behind the rear support cover, passenger's side. It is suggested to divide the lines with 2 diodes.



CAR SECURITY


SPECIFIC VEHICLE ALARM FITTING INSTRUCTIONS

REV. 00

www.cobra.it

FITTING DIAGRAM N°118

Diagram to make the central locking on
VOLKSWAGEN LT 35 mod. 2001
(For Bridge serie antitheft)

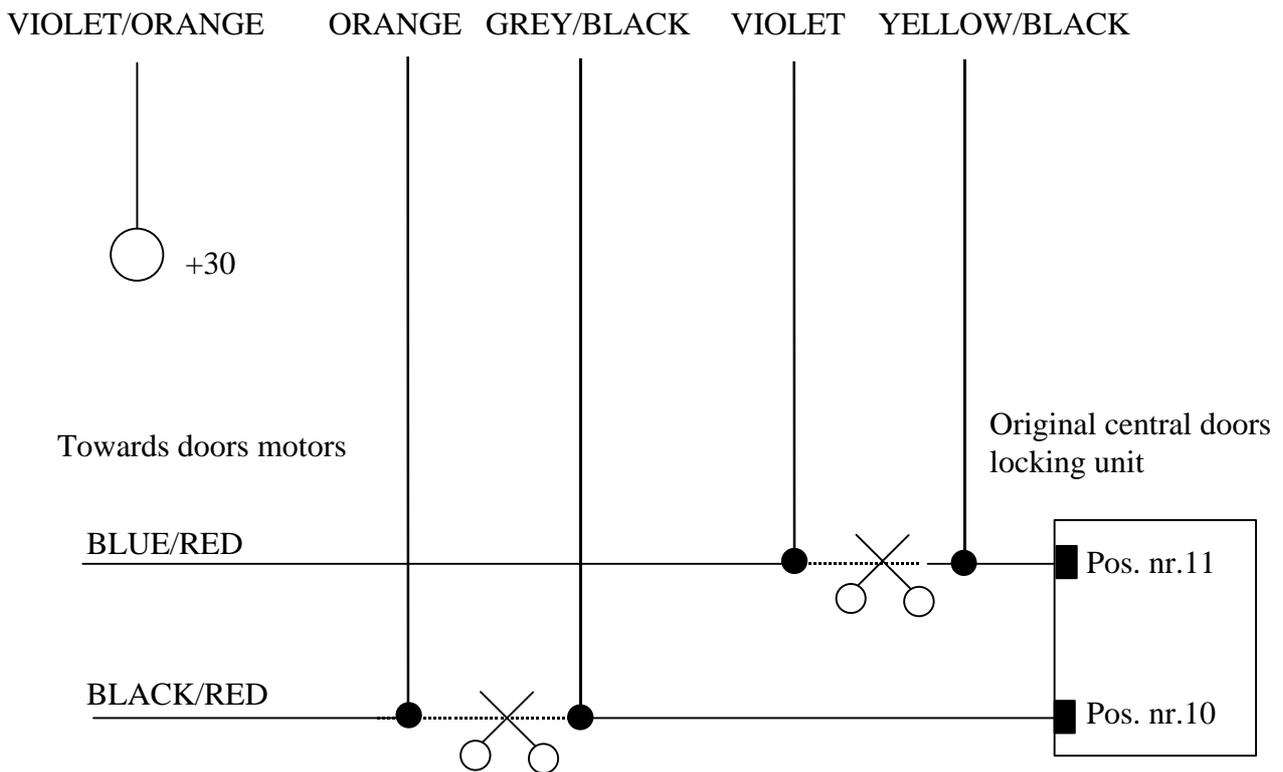



CAR SECURITY

SPECIFIC VEHICLE ALARM FITTING INSTRUCTIONS

REV. 00

www.cobra.it

FITTING DIAGRAM N°118A

Diagram to make the central locking on
VOLKSWAGEN LT 35 mod. 2001
(For 3100 serie antitheft)

VIOLET/WHITE
ORANGE/WHITE

ORANGE GREY/BLACK VIOLET YELLOW/BLACK

