



CAR SECURITY

SPECIFIC VEHICLE ALARM FITTING INSTRUCTIONS

REV. 00

www.cobra.it

MAKE	OPEL	MOD.	CORSA	YEAR	99 →	PETROL	<input checked="" type="checkbox"/>	DIESEL	<input type="checkbox"/>
ALARM/SIREN POSITION	Position the compact alarms and the sirens in the engine compartment, on the support of the driver's side shock absorber. To pass the cables use the original rubber sleeve located near the support of the driver's side shock absorber.								
CENTRAL UNIT POSITION	Position the modular systems and the modules under the left side of the dashboard, driver's side.								
POWER SUPPLY	+ 30 : connect to the general power supply of the fuse box. - 31 : connect with a cable terminal directly to the car body.								
IGNITION WIRE	+ 15/54 : connect to the BLACK wire located in the wiring harness behind the sill cover, driver's side.								
DIRECTION INDICATORS	Connect to the BLACK/WHITE and BLACK/GREEN wires located in the wiring harness behind the driver's side sill cover.								
ELECTRIC WINDOWS	Positive control signal Front window, driver's side: cut the YELLOW wire directly on the coming out of the respective connector of the switch located inside the driver's side door. Front window, passenger's side: cut the VIOLET/WHITE wire. Rear window, driver's side: cut the VIOLET/WHITE wire. Rear window, passenger's side: cut the VIOLET/WHITE wire. Connections must be done in the core hitch coming out of the driver's side door. Note: For the vehicles with windows closing automatism refer to the diagram nr. 111.								
CENTRAL DOORS LOCKING	Negative control signal Connect to the BROWN/WHITE wire (unlock) and to the BROWN/RED wire (lock) located in the wiring harness behind the driver's side sill cover.								
IMMOBILISATION POINT	Fuel pump Cut the 2,5 mm ² RED/BLUE wire located in the wiring harness behind the driver's side sill cover.								
STARTER	+ 50 : Cut the BLACK/YELLOW wire located in the wiring harness coming out of the connector of the ignition key.								
BONNET SWITCH	Install an additional switch on the headlamp support plate.								
DOORS SWITCH	Connect to the LIGHT GREY wire located in the wiring harness behind the driver's side sill cover.								
BOOT SWITCH	Connect to the BROWN/WHITE wire coming out of the connector of the boot lamp.								



CAR SECURITY


SPECIFIC VEHICLE ALARM FITTING INSTRUCTIONS

REV. 00

www.cobra.it

FITTING DIAGRAM N° 111

Diagram to make the electric windows locking on
OPEL CORSA – TIGRA with automatism
(for Bridge serie antithefts)

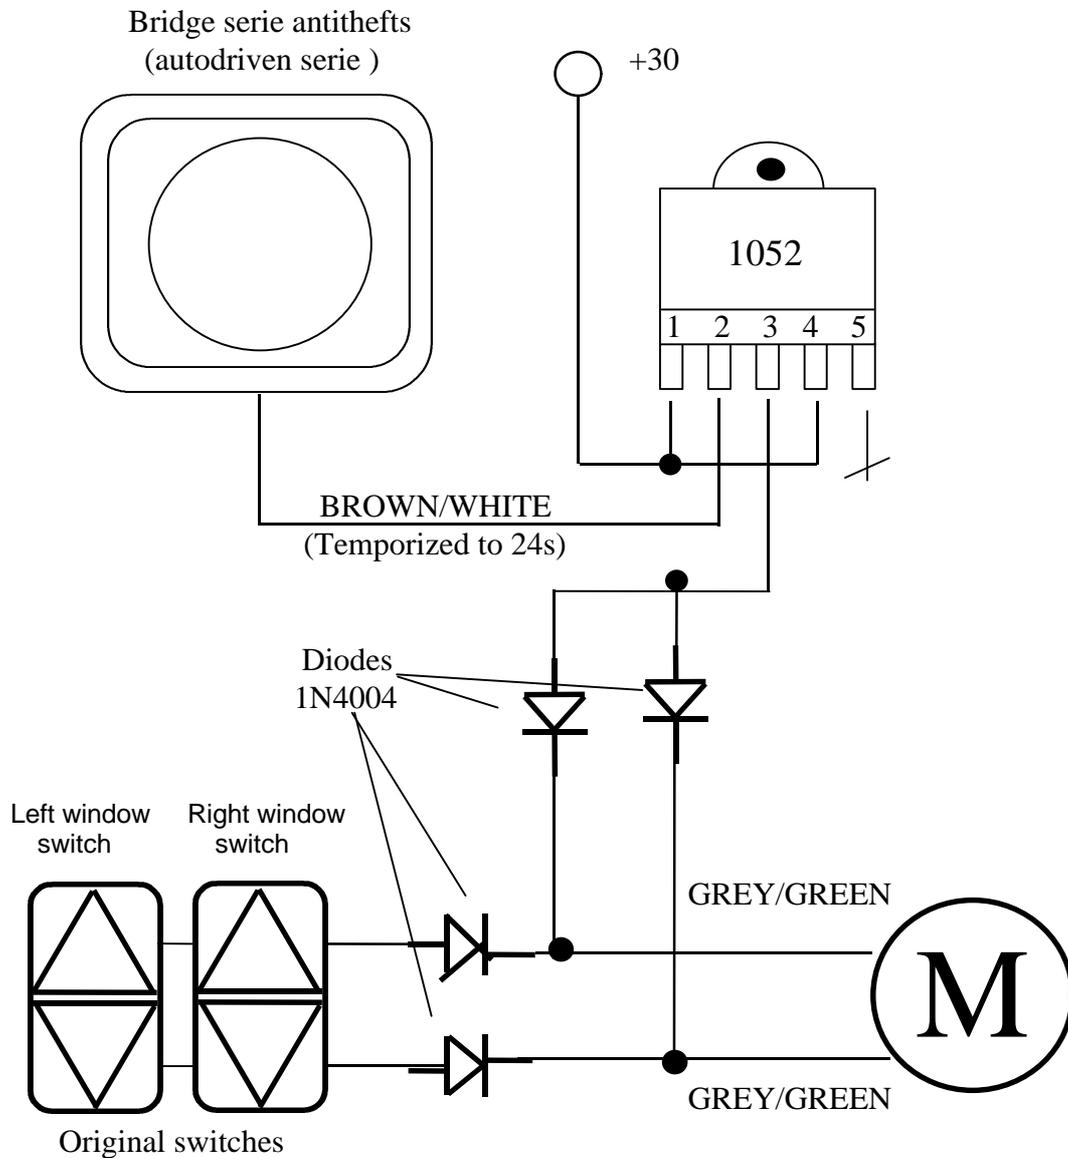

Note: This information is not binding, therefore it must be considered only an example for installation purposes that must be executed as per the instructions given on the product installation manual.

opcor99gbb.doc